







Uni Anchorlock pavers are perfect for municipal, commercial, and industrial applications, including:

- Industrial plants
- Industrial ports
- Storage depots
- Industrial parks
- Military installations
- Factory yards
- Loading docks
- Container and Bus terminals
- Airport Taxiways, Maintenance and Hangar areas

Uni Anchorlock 8 cm x 22.5 cm x 11.25 cm





PRODUCT DATA*

Coverage	Layers per	Coverage per	Weight per	Weight per
per Layer	Pallet**	Pallet	Layer	Pallet
10.34 ft ²	8	82.72 ft ²	380 lbs	3,090 lbs
(0.96 m ²)		(7.68 m ²)	(172.3 kg)	(1401.6 kg)

All Weight per Pallet noted above include a 50 lb pallet weight.

STANDARD SPECIFICATION


Uni Anchorlock pavers are manufactured to industry standard specification ASTM: C 936.

AVAILABLE COLORS

For more information about available colors, please contact a Mutual Materials sales representative. Custom colors may be restricted by the size of the order or project.

PALLET LAYOUT

Uni Anchorlock pavers are designed to be mechanically installed a full layer at a time. Layers are off-set to create a strong, interlocking pavement surface.

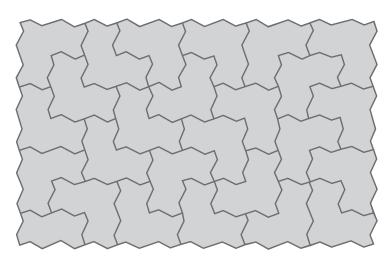


^{*} All metric dimensions are soft converted to Imperial. Dimensions and coverage include 1.5 mm (1/16") joint.

^{**} Uni Anchorlock must be purchased by the full layer or full pallet.

INSTALLATION INSTRUCTIONS

For mechanical installation guidelines for Uni Anchorlock®, please contact a Mutual Materials hardscape sales representative.

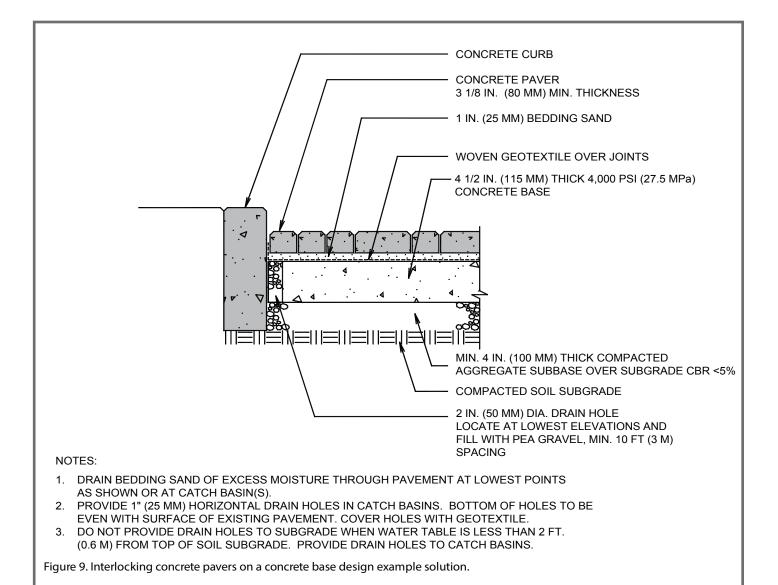

Source: Interlocking Concrete Pavement Institute Tech Spec #4.

Uni Anchorlock® is a registered trademark of Uni-Group USA.

MUTUAL MATERIALS LOCATIONS

For product information and customer service, call 1-888-MUTUALØ (688-8250).

WASHINGTON		OREGON	IDAHO	MONTANA
Auburn	Port Orchard	Bend	Boise	Missoula
Bellevue	South Seattle	Clackamas	Hayden	
Bellingham	Spokane	Durham		
Marysville	Tacoma (Parkland)	Portland		
Olympia (Tumwater)	Vancouver, WA	Salem	MUTUA	LMATERIALS