



# ECO-PRIORA®



With its unique, patented interlocking spacer lugs, Eco-Priora® provides secure structural performance for permeable interlocking concrete pavements (PICP's). It works well under vehicular traffic, especially when compared to other "non-interlocking" permeable pavers.

The flat, durable surface is also well suited for pedestrian pavements and the narrow joints comply with the most recent requirements of the ADA (Americans with Disabilities Act).

## PRODUCT DATA\*

	Stones / sq ft	Pieces / Pallet	Coverage / Pallet	Weight / Unit	Weight / Pallet	Net Void
4 x 8 Unit	4.5	432	93.2 ft <sup>2</sup> (8.65 m <sup>2</sup> )	8 lbs (3.6 kg)	3,456 lbs (1,567 kg)	13%
8 x 8 Unit	2.25	192	83.04 ft <sup>2</sup> (7.71 m <sup>2</sup> )	16 lbs (7.2 kg)	3,172 lbs (1,439 kg)	9%

All **Weight per Pallet** noted above include a 50 lb pallet weight.

\* All metric dimensions are soft converted to Imperial.

## STANDARD SPECIFICATION

Eco-Priora is manufactured to the same high quality specifications as all other Mutual Materials interlocking concrete pavers and meet or exceed the requirements in ASTM C 936, "Standard Specification for Solid Concrete Interlocking Paving Units."

## INSTALLATION PATTERNS

<b>Stacked Bond (4x8)**</b> 	<b>Running Bond (4x8)</b> 	<b>Basketweave (4x8)</b> 	<b>Herringbone (4x8)</b> 
<b>Stacked Bond (8x8)**</b> 	<b>Running Bond (8x8)</b> 	<b>Boxed Basketweave (4x8 &amp; 8x8)</b> 	<b>Combination #2 (4x8 &amp; 8x8)</b> 

\*\* Currently available for mechanical installation.

4 x 8: 75%, 8 x 8: 25%

4 x 8: 50%, 8 x 8: 50%

4 x 8\*  
4" x 8" x 3 1/8"  
100 mm x 200 mm x 80 mm




8 x 8\*  
8" x 8" x 3 1/8"  
200 mm x 200 mm x 80 mm




## AVAILABLE COLORS

Custom colors are available. For more information please contact your Mutual Materials sales representative.




Charcoal



Gray

## PERMEABLE PAVEMENT DESIGN

For more specific and detailed instructions, please contact your Mutual Materials sales representative.

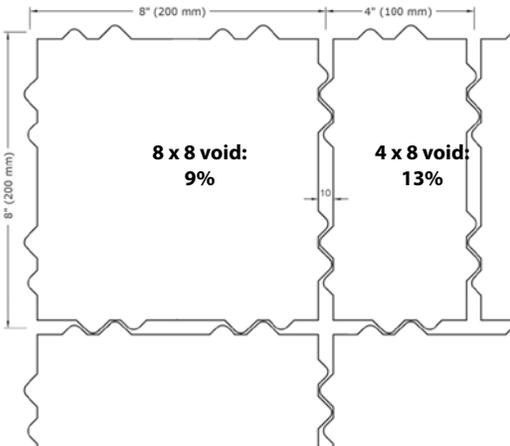


When building permeable pavement structures with Eco-Priora 4 x 8 or 8 x 8, follow design and construction recommendations found in "Permeable Interlocking Concrete Pavements- 4th Edition" as published by the Interlocking Concrete Pavement Institute (ICPI, 2011). Copies are available from ICPI ([www.ICPI.org](http://www.ICPI.org)) or your Mutual Materials representative.

Also, LEED credits may be available for stormwater management, urban heat island reduction, and innovative design (according to the project certification process established by the USGBC).



**Green Note:** EcoPriora permeable pavers may contribute towards LEED credits as determined by the USGBC. Credits vary by project and by manufacturer. For more specific information on how EcoPriora might contribute towards LEED certification for your project, please contact your Mutual Materials sales representative.

## TYPICAL CROSS SECTION (FOR FULL EXFILTRATION DESIGNS)

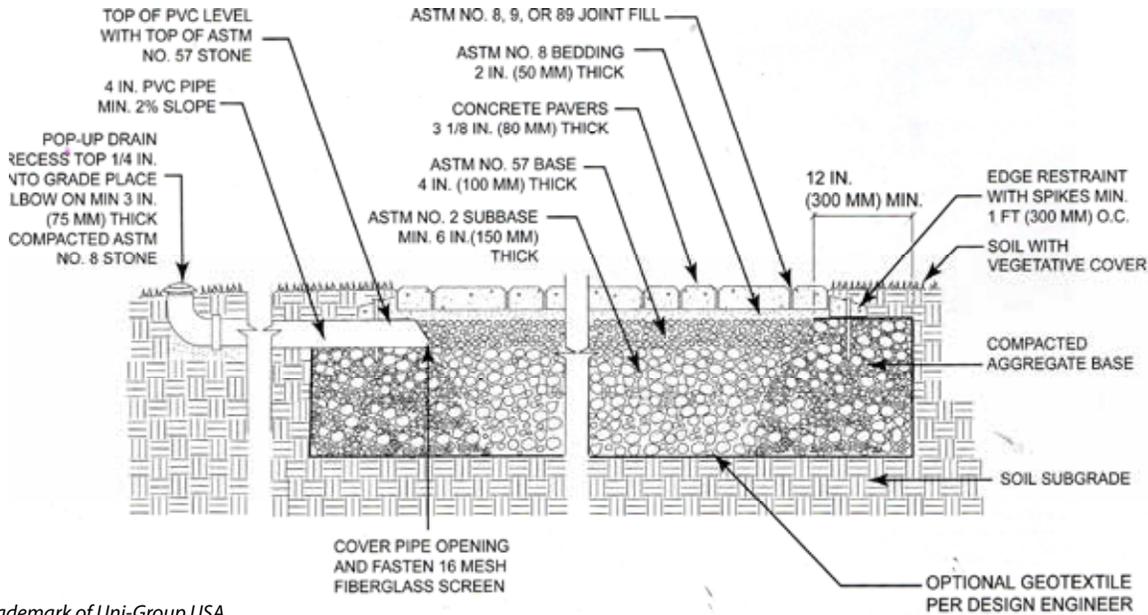

Eco-Priora® is a trademark of Uni-Group USA.

## MUTUAL MATERIALS LOCATIONS

For product information and customer service, call 1-888-MUTUALØ (688-8250).

WASHINGTON		OREGON		IDAHO		MONTANA	
Auburn	Port Orchard	Bend		Boise		Missoula	
Bellevue	South Seattle	Clackamas		Hayden			
Bellingham	Spokane	Durham					
Marysville	Tacoma (Parkland)	Portland					
Olympia (Tumwater)	Vancouver, WA	Salem					



**MUTUALMATERIALS®**