



# PORCELAIN SLABS



POOLS



PATIOS



WALKWAYS

## Contemporary Design, Premium Performance


Porcelain slabs elevate outdoor living to a new level of sophistication and modern elegance. Our porcelain slabs provide a European contemporary style to create modern luxury outdoor living areas that withstand the Pacific Northwest weather.

Porcelain architectural slabs are suitable for both commercial and residential use, in applications such as pedestrian walkways, patios, pool sides, and outdoor living areas.




## INSTALLATION PATTERNS


RUNNING BOND



STACKED BOND



## Porcelain Slab Unit

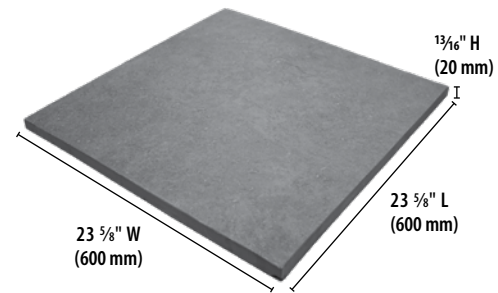

## AVAILABLE COLORS



Vintage



Pepper




Bluestone Select



Simply Grey



Silver Quartz



Absolute



Limestone

## STRONGER & LIGHTER THAN CONCRETE

Compared to a concrete slab of the same square foot size, porcelain slabs provide higher strength in lighter weight. Porcelain has better resistance to stains and is easier to clean.

## MOSS & STAIN RESISTANT

Porcelain is an impervious tile with a water absorption rate of 0.1% for high resistance to stains, salts, acids, bases, molds, and moss growth.

## EASY TO CLEAN, LOW MAINTENANCE

Porcelain does not need to be sealed. It is virtually maintenance free and can be cleaned using a common detergent and water.

## SCRATCH RESISTANT

Porcelain registers as an 8 on the Mohs hardness Scale (higher scratch resistance than quartz).

## HIGH STRENGTH & LOAD BEARING SPECS

High flexural strength: more than 9,000 psi (ASTM C293)

High compressive strength: more than 42,000 psi (ASTM C140)

High-breakage load: more than 2,200 lbs (1,000 Kg), and as high as 3,669 lbs per slab (ASTM C648)

## SLIP RESISTANT SPECS

R11 A+B+C slip test rating. Acceptable for use on commercial ramps and pool surfaces.

- R11 is a slip resistance test covered in oil at an inclination between 19 and 27 degrees
- A+B+C is a barefoot test at the highest level of inclination
- COF > 0.6
- DCOF ANSI A137.1-2012 – meets requirement for commercial areas that are likely to be wet
- SCOF ANSI C1028-2007 – exceeds standard slip resistance tests in both wet and dry conditions

## INSTALLATION METHODS

- GRAVEL OR SAND ONTO GROUND (Pedestrian foot traffic)
- GRAVEL OR GRASS ONTO GROUND ( Pedestrian foot traffic)
- CEMENTITIOUS ADHESIVE INSTALLATION ONTO CONCRETE BASE (Vehicle traffic)

## PORCELAIN PAVERS

PORCELAIN PAVERS			Weight Lbs		Packaging	
Item Code	Color	Dimensions	Each	Per SF	Per Case	Per Pallet
119587	Absolute	23 5/8" x 23 5/8" (60 cm x 60 cm)	36.4 lbs each	9.4 lbs per SF	2 pieces	60 pieces
119312	Bluestone Select					
119311	Limestone					
119310	Pepper					
119887	Silver Quartz					
119370	Simply Grey					
119143	Vintage					

## MUTUAL MATERIALS LOCATIONS

For product information and customer service, call **1-888-MUTUALØ (688-8250)**.

WASHINGTON		OREGON		IDAHO		MONTANA	
Auburn	Port Orchard	Bend		Boise		Missoula	
Bellevue	South Seattle	Clackamas		Hayden			
Bellingham	Spokane	Durham					
Marysville	Tacoma (Parkland)	Portland					
Olympia (Tumwater)	Vancouver, WA	Salem					



**MUTUALMATERIALS®**