



UNI-ECOLOC®

Commercial Pavers



Uni Ecoloc® is an environmentally beneficial heavy-duty paving system designed to reduce stormwater runoff on industrial and commercial pavements.

Uni Ecoloc is a L-shaped interlocking concrete paver and part of the Uni-Anchorlock family of pavers. Uni Ecoloc pavers provide a highly durable, yet permeable pavement capable for supporting the highest vehicle loads. When installed, the unique patented design creates drainage openings in the pavement's surface, which facilitate rainwater infiltration like the Eco-Stone® system. Uni-Ecoloc is a mechanically installed product.

Uni Ecoloc pavers are perfect for municipal, commercial and industrial applications, including:

- Industrial plants
- Industrial ports
- Storage depots
- Industrial parks
- Military installations
- Factory yards & streets
- Loading docks
- Container and bus terminals
- Airport taxiways, Maintenance and Hangar areas

PRODUCT DATA*

Coverage per Layer	Layers per Pallet**	Coverage per Pallet	Weight per Layer	Weight per Pallet
11.35 ft ² (1.055 m ²)	8	90.8 ft ² (8.44 m ²)	315 lbs. (143 kg)	3,360 lbs (1,524 kg)

All Weight per Pallet noted above includes a 50 lb pallet weight.

** All metric dimensions are soft converted to Imperial. Dimensions and coverage include 1.5 mm (1/16") joint*

*** Uni Ecoloc must be purchased by the full layer or full pallet.*


STANDARD SPECIFICATION

Uni-Ecoloc pavers are manufactured to industry standard specification ASTM: C 936.

AVAILABLE COLORS

For more information about custom colors, please contact a Mutual Materials sales representative. Custom colors may be restricted by the size of the order or project.

PALLET LAYOUT

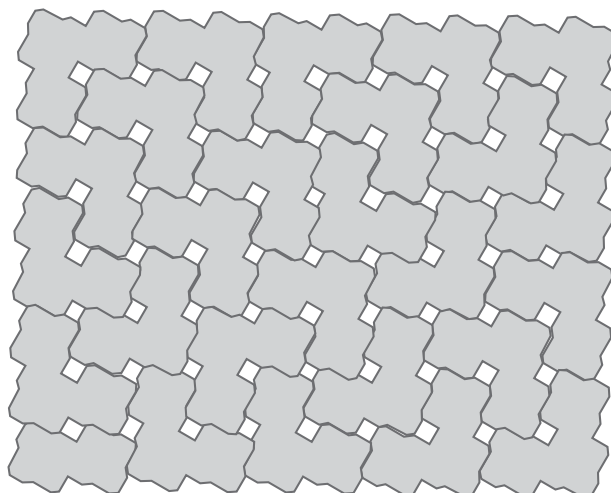


Uni Ecoloc®
3 1/4" x 8 7/8" x 8 7/8"
(8 cm x 22.5 cm x 22.5 cm)



INSTALLATION INSTRUCTIONS

Design and installation of Uni Ecoloc® is different from typical interlocking concrete pavers, due to the need for designing with aggregates that aid in rainwater infiltration. For detailed design considerations and installation instructions, please see *ICPI Permeable Interlocking Concrete Pavement Manual* and other design reports available from your sales representative.

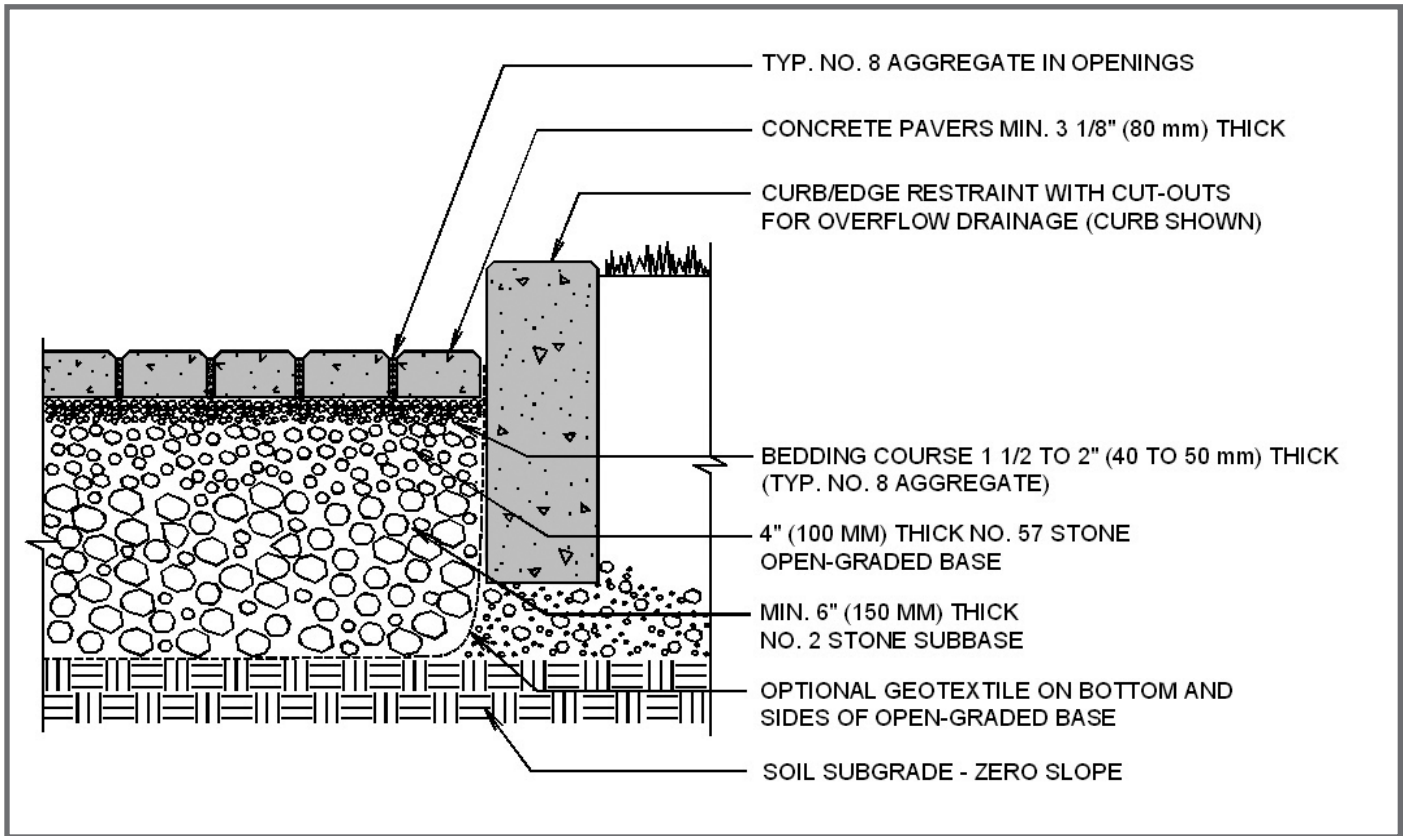

Typical installation for exfiltration.

Uni Ecoloc® is a registered trademark of Uni-Group USA.

MUTUAL MATERIALS LOCATIONS

For product information and customer service, call **1-888-MUTUALØ (688-8250)**.

WASHINGTON		OREGON	IDAHO	MONTANA
Auburn	Port Orchard	Bend	Boise	Missoula
Bellevue	South Seattle	Clackamas	Hayden	
Bellingham	Spokane	Durham		
Marysville	Tacoma (Parkland)	Portland		
Olympia (Tumwater)	Vancouver, WA	Salem		

