



UNI ECO-STONE®



Green Note:

Uni Eco-Stone® permeable pavers may contribute towards LEED credits as determined by the USGBC. Credits vary by project and by manufacturer. For more specific information on how Uni Eco-Stone might contribute towards LEED certification for your project, please contact your Mutual Materials sales representative.

The Uni Eco-Stone® paving system is an innovative, environmentally-beneficial pavement system designed to reduce stormwater runoff. When installed, the unique patented design creates drainage openings in the pavement surface which facilitate rainwater infiltration. Uni Eco-Stone is a true interlocking concrete paver that can support heavy vehicular loads, unlike some other types of permeable pavement systems. Uni Eco-Stone can be installed in several patterns and used in a variety of applications.

Uni Eco-Stone pavers are perfect for residential, municipal, commercial and industrial applications, including:

- Driveways
- Industrial plants
- Parking lots
- Industrial yards
- Gas stations
- Factory streets
- Bridge abutments
- Highway ramps
- Crosswalks
- Bridge underpasses
- Street medians
- Bus terminals


PRODUCT DATA*

Coverage	Pieces per Pallet	Coverage per Pallet	Weight per Piece	Weight per Pallet
3.52 pcs / ft ² (37.9 pcs / m ²)	320	90.8 ft ² (8.44 m ²)	10 lb (4.5 kg)	3,250 lb (1,474.1 kg)

All Weight per Pallet noted above include a 50 lb pallet weight.

** All metric dimensions are soft converted to Imperial. Dimensions and coverage include 1.5 mm (1/16") joint.*

Height /Thickness	Width	Length	Stones per sq ft	Percent of Void
3.125 inch (80 mm)	4.5 inch (115 mm)	9 inch (230 mm)	3.55	12.18%

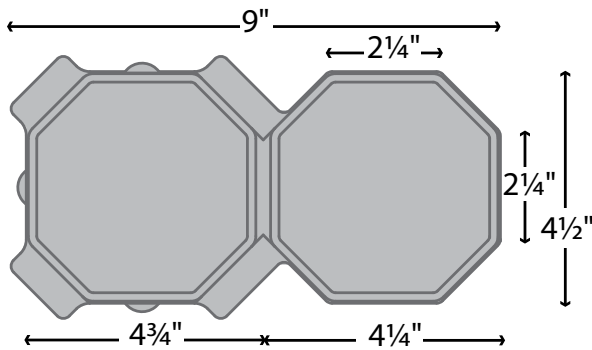

Uni Eco-Stone Unit*
3 1/8" x 9" x 4 1/2"
100 mm x 200 mm x 80 mm



STANDARD SPECIFICATION


Uni Eco-Stone pavers are manufactured to industry standard specification ASTM: C 936.

AVAILABLE COLORS

For more information about colors, please contact a sales representative. Custom colors may be restricted by the size of the order or project.




INSTALLATION PATTERNS

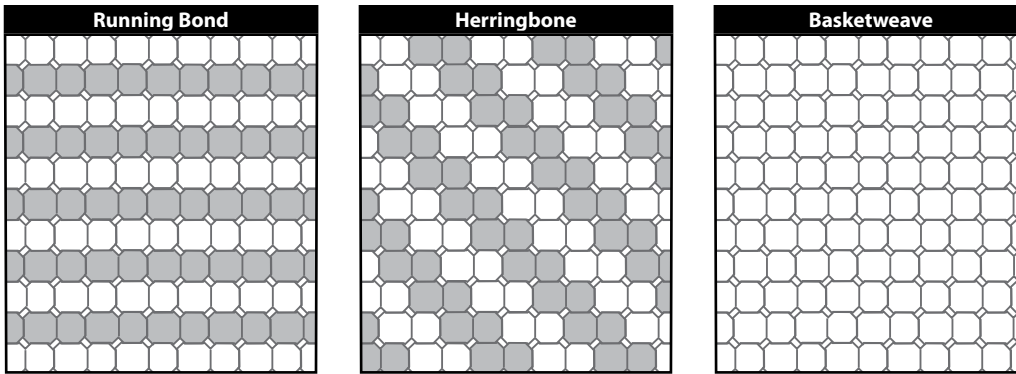

INSTALLATION INSTRUCTIONS

Design and installation of Uni Eco-Stone® is different from typical interlocking concrete pavers, due to the need for designing with aggregates that aid in rainwater infiltration. For detailed design considerations and installation instructions, please see *ICPI Permeable Interlocking Concrete Pavement Manual* and other design reports available from a sales representative.

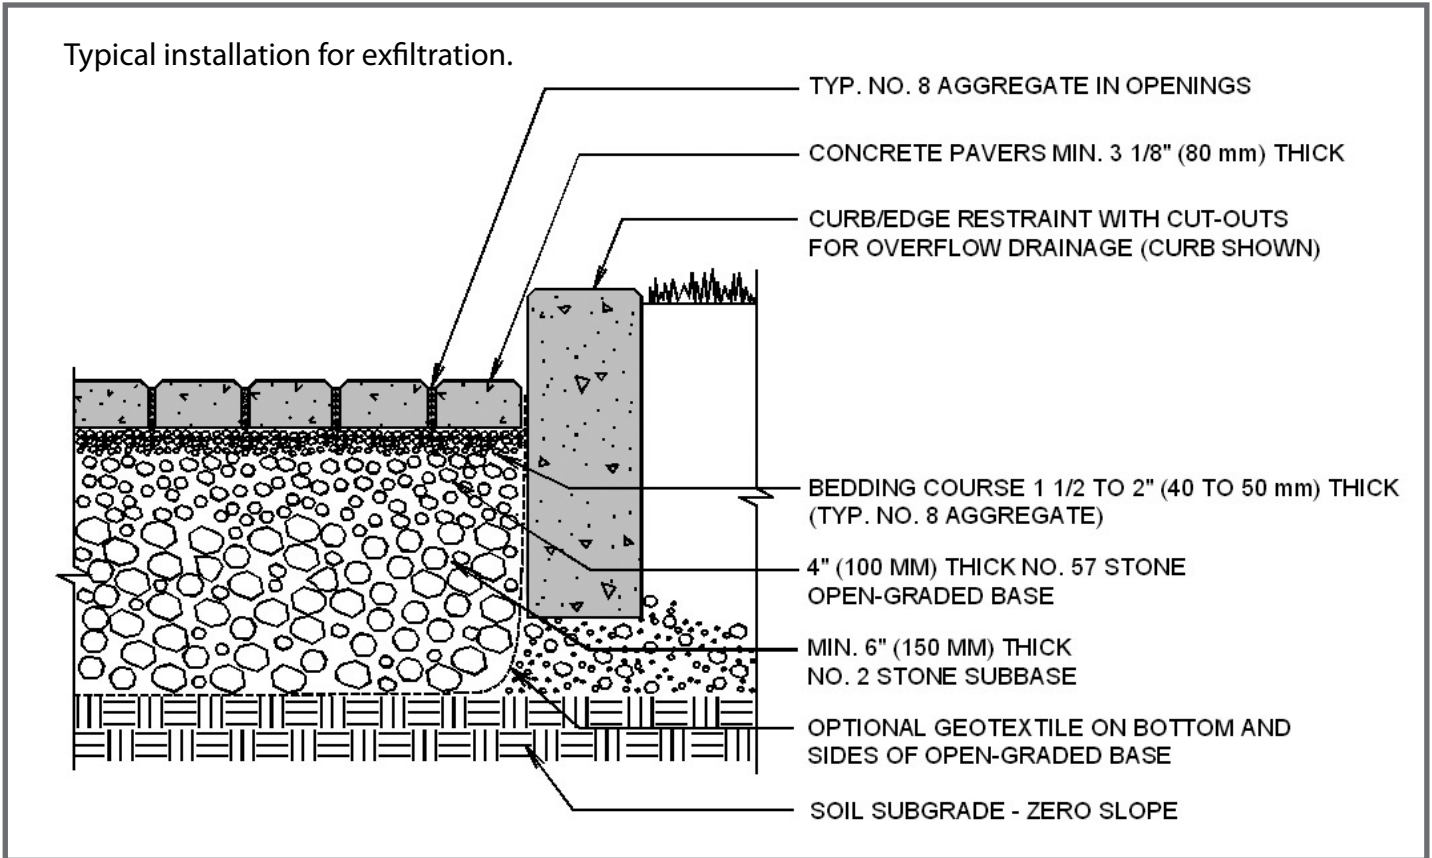

Uni Eco-Stone® is a trademark of Uni-Group USA.

MUTUAL MATERIALS LOCATIONS

For product information and customer service, call 1-888-MUTUALØ (688-8250).

WASHINGTON		OREGON		IDAHO		MONTANA	
Auburn	Port Orchard	Bend		Boise		Missoula	
Bellevue	South Seattle	Clackamas		Hayden			
Bellingham	Spokane	Durham					
Marysville	Tacoma (Parkland)	Portland					
Olympia (Tumwater)	Vancouver, WA	Salem					

