

Retaining Wall



ManorStone[®] retaining wall blocks offer exceptional versatility and ease-ofuse making them an ideal product for a wide variety of landscaping projects. Choose from wall units with radius or flat faces, straight-

sided, or tapered. Mix and match different units to create

visual interest. These versatile

units can build staircases and add caps for a finished look. ManorStone is the perfect choice for creating an outdoor

RETAINING WALLS



Radius Split Face 6" x 16" x 12" (15.2 cm x 40.6 cm x 30.5 cm)



Available in Gray, Northwest Blend and Summit Blend.

Corner Split Face 6" x 16" x 8" (15.2 cm x 40.6 cm x 20.3 cm)



Available in Gray, Northwest Blend and Summit Blend.

PRODUCT DATA

Radius Split Face

Flat Split Face

Straight Side Flat

Split Face

Corner Split Face

Tapered Cap 3x18

Split Face

Cap 3x16 Smooth

Face

Smooth Face

Revers-a-Cap

Coping Unit

Flat Split Face 6" x 16" x 12" (15.2 cm x 40.6 cm x 30.5 cm)



Available in Gray, Northwest Blend and Summit Blend.

Tapered Cap 3x18 Split Face 3" x 18" (front face) x 13" x 12" (back face) (7.6 cm x 45.7 cm x 33 cm)



Available in Charcoal, Gray, Northwest Blend and Summit Blend.

Straight Side Flat Split Face 6" x 16" x 12" (15.2 cm x 40.6 cm x 30.5 cm)




Available in Gray, Northwest Blend and Summit Blend.

Cap 3x16 Smooth Face 3" x 16" x 12 3/8" (7.6 cm x 40.6 cm x 31.4 cm)



Available in Gray and Onyx.

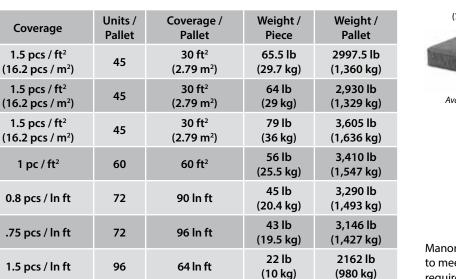

living space - ideal for retaining walls up to 3.5 feet.

Smooth Face Revers-a-Cap 3" x 7"(front) x 14" x 8' (7.6cm x 17.7 cm x 35.4 cm x 20.3 cm)



Available in Cascade Blend and Onyx.

Coping Unit 3" x 23 5/8" x 12" (7.6 cm x 60.34 cm x 30.5 cm)



Available in Cascade Blend, Gray and Onyx.

ManorStone is manufactured to meet or exceed the requirements in ASTM C-1372. Standard Specification for Drycast Segmental Retaining Walls

All Weight per Pallet noted above include a 50 lb pallet weight. Maximum wall height: 3' 6". Minimum radius: 2' 8".

56

AVAILABLE TEXTURES & COLORS

0.5 pcs / In ft



Northwest Blend Radius Split Face texture shown Split Face texture shown

©2024 Mutual Materials 7/2024 www.MutualMaterials.com



112 In ft

Radius Split Face texture shown



62 lb

(28 kg)

3,696 lb

(1,676 kg)

Charcoal

Additional colors available for Cap products

Onyx

PROJECT ESTIMATION

NOT TO EXCEED 3' 6"		WALL LENGTH (0.75 units per lineal foot)					
WALL HEIGHT	COURSES	10 ft	15 ft	20 ft	25 ft	30 ft	35 ft
1'	2	15	23	30	38	45	53
1'-6"	3	23	34	45	57	68	79
2'	4	30	45	60*	75	90	105
2' 6"	5	38	57	75	92	113	132
3' 0	6	45	68	90	113	135	158
3' 6"	7	53	79	105	132	158	184

Blocks needed for 5' 5" diameter circle* Wall Height Courses Blocks 1' 2 24 1'-6" 3 36 2' 4 48 60 2'6" 5 3' 6 72 3'6" 7 12

* Diameter becomes smaller as you add courses due to 1" set-back per course. Cutting may be required as the wall gets higher.

*Example: It takes 60 ManorStone to build a wall 20' long and 2' tall.

INSTALLATION INSTRUCTIONS (For more specific and detailed instructions, please contact your Mutual Materials sales representative.) *Maximum gravity wall height: 3'6", Minimum radius circle: 2'8"*

- **1. Excavation:** First mark the area of the wall with chalk or spray paint and then string a line. Dig out a trench that is a minimum of 9" (230 mm) deep plus one inch for every foot of wall height. Allow 12" (305 mm) of space behind the wall for ³/₄" washed drain rock (this means your trench should be 30" wide). Roots and large rocks must be removed from the trench.
- **2. Base Preparation:** The project requires a perforated drain, cover the back and the bottom of the trench with a geotextile to prevent soil from blocking the drainage system. Measure geotextile fabric with excess length of about 12" (305 mm) at the top of the bank, which will be folded over the completed drainage fill.
- **3. Foundation:** Install a 4" (102 mm) diameter perforated drain in this foundation and connect it to the existing drainage system. Next, prepare a 6" (152 mm) deep foundation with 5⁄8 minus or 3⁄4 minus crushed rock. Add 1"–2" of 5⁄8 minus or 3⁄4 minus crushed rock, rake smooth and compact with plate compactor. Base rock should have a certain amount of moisture content. Repeat steps until final 6" base elevation is achieved.
- **4. First Course:** Lay the base course of retaining wall blocks. Using a string line at the back of the units for alignment, place units side by side on the gravel checking for level in both directions. Begin laying block at the lowest point of the wall and/or 90° corner. It is easier to start at a straight section of the wall. Complete the base course before proceeding to the second course. Be aware that the blocks have a ³/₄" set back. When curves are laid out, space the base course block slightly apart to allow for their set back.

NOTE: Before installing additional courses, it is recommended that the installer front fills and backfills the first course with base rock and compacts to ensure stability of the wall.

- 12" 12" hands the first the states Do not 6" slope so behind wall. Max Avoid Wall heavy loads Height within 3'6" 3 feet of top of wall. Geotextile F 3" (min.) Soil on site 6" Perforated Drain Do not slope soil more than ¹/2-inch per foot away from wall.
- 5. Second & Additional Courses: Sweep top of underlying course and stack next course in running bond pattern so the middle of the unit is above the joint between adjacent blocks below. To cut blocks for the ends of the wall or in tight curved sections, use a hammer and chisel to score the unit on all sides. Always wear eye protection when splitting stones. If many cuts are needed, a masonry saw may be the better option.
- **6. Backfilling:** After each course is laid, backfill behind the wall with ³/₄" washed drain rock. This improves drainage and prevents soil from leaching through the wall face.
- **7. Top Course:** Use concrete adhesive to secure the cap course. Apply the adhesive with a caulking gun. Lay the cap down and press firmly. Finish backfilling behind the wall.

ManorStone® is a registered trademark of Mutual Materials Co.

MUTUAL MATERIALS LOCATIONS

For more product information or to reach our customer service, please call 1-888-688-8250.

WASHINGTON		OREGON	IDAHO	MONTANA	
Auburn	Port Orchard	Bend	Boise	Missoula	
Bellevue	South Seattle	Clackamas	Hayden		
Bellingham	Spokane	Durham			
Marysville	Tacoma (Parkland)	Portland			
Olympia (Tumwater)	Vancouver, WA	Salem	ΜυτυΑ	I MATERIAI S	
	Woodinville				

©2024 Mutual Materials 7/2024 www.MutualMaterials.com